

Outdoor Compact RFID Device



XPass 2 is an outdoor compact RFID device based on Suprema's state-of-the-art RFID technology and multi-hardware platform. With the multi-form factor technology, mullion-type, gangbox-type, and gangbox keypad-type are all supported which provides perfect installation in various environments. XPass 2 also supports dual-frequency (125kHz / 13.56MHz) RFID technology and can read the mobile cards using NFC and BLE, the latest mobile communication technologies. Packed in a rugged IP65/IP67 rated dust & waterproof performance as well as IK08 rated vandal-proof structure, suitable for tough environment and outdoor installation.



XPass 2 Outdoor Compact RFID Device


Features -

Specifications -

Card	Mobile Access	RF Option	125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire, DESFire EVI/EV2/EV3*, FeliCa
		CPU	1 GHz
OSDP	Industry standard communication via OSDP	Memory	4GB Flash + 64MB RAM
		Max. Users	200,000
		Max. Text Logs	1,000,000
×	Multi-type hardware structure	Mobile card	NFC, BLE
		Ingress Protection	IP67
		Vandal Proof	IK08
\odot	Enhanced security with the Secure Element	Installation type	XP2-MDPB: Mullion XP2-GDPB, XP2-GKDPB: Gangbox
JIP67	IP67 - Water and Dust Resistant	Keypad	XP2-MDPB, XP2-GDPB: Not Supported XP2-GKDPB: Supported (3x4)
		Ethernet	Supported (10/100 Mbps, auto MDI/MDI-X)
		RS-485	1ch Host or Slave (Selectable)
	IK08 - Vandal Resistant	Wiegand	1ch In or Out
		TTL Input	2ch Input
Corto	Multi-card Reading	Relay	1 Relay
		PoE	Supported (IEEE 802.3af compliant)
		Sound	Multi-tone buzzer
PoE	Power over Ethernet	Operating Temperature	-35 °C ~ 65 °C
		Operating Humidity	0% ~ 95%, non-condensing
		Power	DC 12V 0.5A, DC 24V 0.3A
	Homing bump on keypad for the visually impaired	Dimensions (WxHxD, mm)	XP2-MDPB: 48 x 145 x 27 XP2-GDPB, XP2-GKDPB: 80 x 130 x 25
		Certificates	CE, FCC, KC, ROHS, REACH, WEEE, SIG

* DESFire EV2/EV3 cards are supported by having backward compatibility of DESFire EVI cards CSN and smart card functions are compatible with XPass 2.

System Configurations

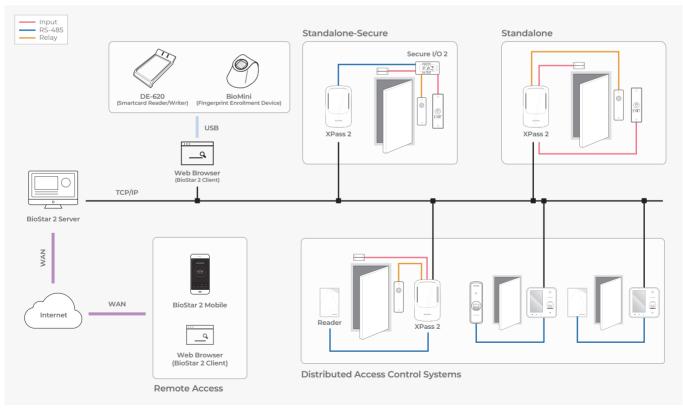

Suprema Inc.



17F Parkview Tower, 248, Jeongjail-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13554, Republic of Korea **T** +82 31 783 4502 **W** www.supremainc.com



For more information visit our website below by scanning the QR code. https://www.supremainc.com/en/about/contact-us.asp

©2023 Suprema Inc. Suprema and identifying product names and numbers herein are registered trade marks of Suprema Inc. All non-Suprema brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice. [SUPREMA-AHL-XP2-EN-REV07]